



PACKING

1 PC IN A ZIP BAG

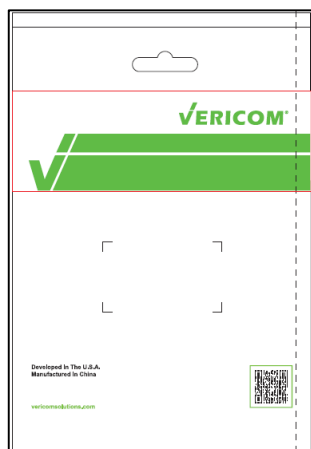

***Note: All relevant materials are complied with RoHS directive.**

9	TRANSPARENT COIL CABLE TIE, LENGTH 40mm	1
8	L/N WITH TRANSPARENT LABEL 20*20mm	1
7	BLACK HEAT SHRINK TUBE Ø4.0*15mm	2
6	MARK RING, COLOR YELLOW (#1 & #2)	4
5	SC/UPC SM/ BLUE HOUSING / BOOT COLOR: BLUE	1 SET
4	LC/UPC SM/ BLUE HOUSING / BOOT COLOR: BLUE TUBE COLOR: YELLOW & WHITE	1 SET
3	SM, DX/ UL, G652D, 9/125, OD1.8*3.7mm, CORNING, JACKET YELLOW (PT123C), DRAWING NO. EQ00602C-019	L + 100MM
2	SC/UPC SM/ 1.0	2
1	LC/UPC SM/ 1.0	2
No.	COMPONENT DESCRIPTION	Quantity

CABLE MARKING

VERICOM OPTICAL FIBER CABLE (UL) E519838 TYPE OFNR 70°C RISER CABLE 1.8mm OS1/OS2 TIA-568-C.3 ROHS COMPLIANT BATCH NO XXM

P1		P2
1	_____	1
2	_____	2

CHECKED

APPROVED			UNLESS OTHERWISE SPECIFIED: TOLERANCES 0 ~ 200 mm ± 10 mm 201 ~ 1000 mm ± 20 mm 1001 ~ 1500 mm ± 25 mm 1501 ~ 2100 mm ± 30 mm 2100 ↑ ± 40 mm
CHECKED			
DRAWING		TITLE	OPTICAL FIBER CABLE
DATE	06/14/20	ITEM NO.	PC06U20218RYE**M
		UNIT: mm	

Length (L)	Bag	Quantity
1M	150*240*0.08mm	400
2M	150*240*0.08mm	300
3M	150*240*0.08mm	250
4M	150*240*0.08mm	200
5M	150*240*0.08mm	200
6M	150*240*0.08mm	160
7M	150*240*0.08mm	140
8M	150*240*0.08mm	130
9M	150*240*0.08mm	130
10M	150*240*0.08mm	120
15M	170*290*0.08mm	70
20M	170*290*0.08mm	60
30M	170*290*0.08mm	40

TRANSMISSION PERFORMANCE

Meets or exceeds ISO/IEC 11801, TIA/EIA-568-C.3, TIA-604-10 (FOCIS-10), TIA-604-3 (FOCIS-3)

MECHANICAL


Connector Insertion Loss : 0.35dB max. (LC Singlemode)
 Connector Insertion Loss : 0.50dB max. (SC Singlemode)
 Connector Return Loss : 55dB min. (OS1 / OS2)
 Connector Durability : 500 Cycles

PHYSICAL

Storage and shipping temperature: -40°C to 70°C
 Operating and installation temperature: -20°C to 70°C

NOTE:

All relevant materials are RoHS Compliant.

APPROVED			UNLESS OTHERWISE SPECIFIED: TOLERANCES		
CHECKED			0 ~ 200 mm	± 10 mm	
DRAWING		TITLE	OPTICAL FIBER CABLE	201 ~ 1000 mm	± 20 mm
DATE	06/14/20	ITEM NO.	PC06U20218RYE**M	1001 ~ 1500 mm	± 25 mm
		CHECKED		1501 ~ 2100 mm	± 30 mm
				2100 ↑	± 40 mm
				UNIT: mm	