




Basic Rack Mount PDU - 20A, 100-120V, 1.9kW w/NEMA 5-20R

Description

Vericom Basic Rack Mount PDUs distribute reliable power to IT equipment in a wide variety of applications where intelligence and/or remote monitoring are not required.

VPB-L522420V features (24) NEMA 5-20R outlets protected by a single 20A circuit breaker, a reset button in the event of an overload, and a durable anodized aluminum chassis. A 10 ft power cord with a NEMA L5-20P twistlock plug connects to an external power supply, while the versatile mounting design allows outlets to face any of three directions.

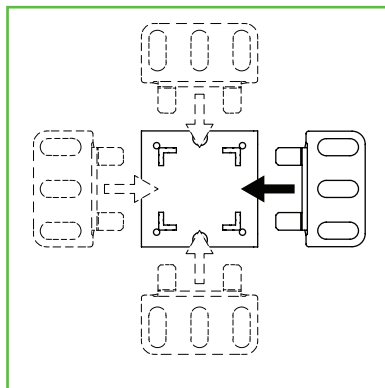

Product Features

- 24 NEMA 5-20R outlets
- Single 20A circuit breaker w/reset button
- Switchless design prevents accidental shutdowns
- Includes button mounts for vertical mounting to Vericom network and server cabinets, as well as toolless mounting brackets that allow outlets to face the front, rear, or side.
- Conforms to UL 60950-1 and is RoHS compliant



Basic Rack Mount PDU - 20A, 100-120V, 1.9kW w/NEMA 5-20R

OVERVIEW	
Item Number	VPB-L522420V
PDU Type	Basic
Form Factor	Vertical (zero U)
UPC Code	846788117338
OUTPUT	
Rated Output Voltage	120V Single Phase
Output Receptacles	(24) NEMA 5-20R
Overload Protection	(1) 20A Circuit Breaker
INPUT	
Rated Input Voltage	120V Single Phase
Max. Input Current	20A
Frequency	50/60 Hz
Power Capacity	1.9 kW
Plug Type	NEMA L5-20P Twistlock
Cord Type	12/3 AWG
Cord Length	10 ft (3.05 meters)
PHYSICAL	
Unit Width	38.9 inches (989mm)
Unit Height	1.7 inches (44.0mm)
Unit Depth	1.7 inches (44.0mm)
Unit Weight	4.9 lbs (2.2 kgs)
Shipping Length	43.3 inches (1,098.6mm)
Shipping Width	4.0 inches (101.6mm)
Shipping Height	3.2 inches (81.3mm)
Shipping Weight	5.4 lbs (2.4 kgs)
Chassis Material	Anodized Aluminum (black)
Mounting Options	1) Pre-installed button mounts, and 2) Toolless 4-way mounting brackets
ENVIRONMENTAL	
Operating Temperature	30° to 140° F (0° to 60° C)
Operating Relative Humidity	0 - 95%
Operating Elevation	0 - 13,123 ft (4,000 meters)
SPECIAL FEATURES	
Breaker Reset	Push button on front
COMPLIANCE	
Certifications	Tested to conform to UL 60950-1; IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013: CB Scheme RoHS
Warranty	2-year limited warranty