

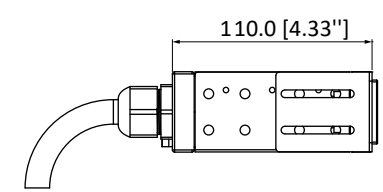


1 2 3 4 5 6 7 8

A

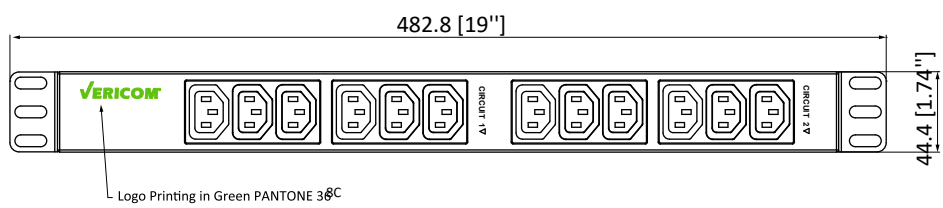


B

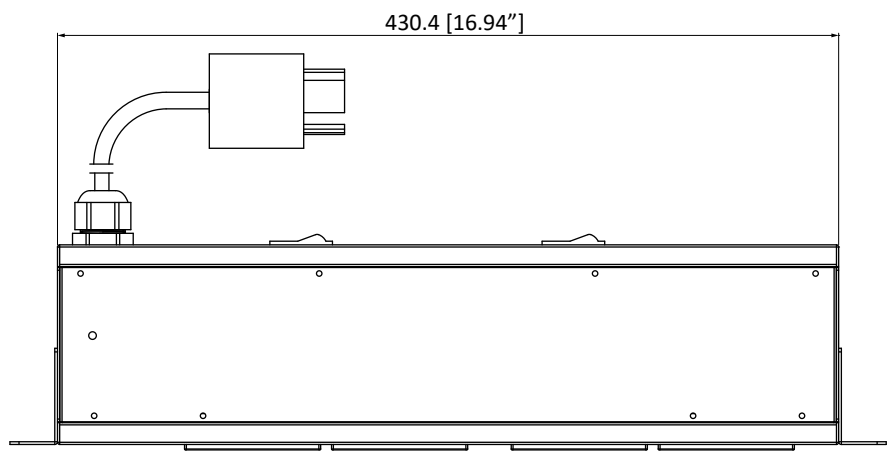

C

D

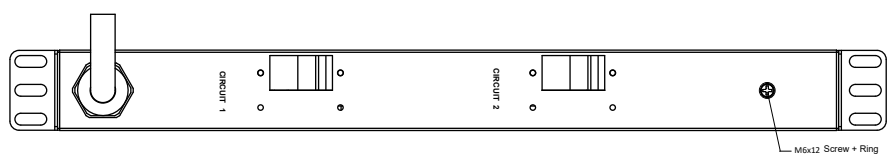

E

Basic Series	OUTPUT (12) IEC C13 (208V 15A)	OPERATING TEMPERATURE 0° to 60°C
INPUT 200-240V 30A 50/60HZ NEMA L6-30P Twistlock 3.1m 10/3 AWG Power lead	BRANCH CIRCUITS (2) Carling 20A 2pole L32-B0-24-620-H62-D3	MOUNTING ACESORIES (2) Option 2

Revisions		
Rev	Description	Date

DRAWING TYPE CATIA (NO PERMISSION, NO CHANGING)	
unit=mm	
TECHNICAL STANDARD IT11; NO RUSTNESS NO FLAW ON THE SURFACE	
FILLET	R0.5
ANGLE	±0.5°
FIRST ANGLE 	

VPB-L631213H	
Housing	steel
	Black Powder coating
	RAL9004
VERICOM	
DATE 06-07-2020	

F

1 2 3 4 5 6 7 8